■ Temperature range

Туре		Temperature range (°C/°F)															
Gauge	°C	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125
	°F	122	131	140	149	158	167	176	185	194	203	212	221	230	239	248	257
A series	T8-50A	0		G		0		0		0		0		0		0	
	T5-60A			0		-		-		-		-					
	T5-50A	5		9		0		-		0							
	T3-100A											-		0		-0	
	T3-80A							0		-		-0					
	T3-70A					<u></u>				-0							
	T3-60A			6		-0-											
B	T8-60B			9	9	-	-	-	-	-	0						
	T5 100B											<u></u>	-	-	0	-	
	T5-75B						6	-		-	-						
	T5-65B				0	0	0	-									
	T5-50B	5	ő	-	-												
T1 series	T1-100											•					
	T1-95										0						
	T1-90									0							
	T1-85								0								
	T1-80							0									
	T1-75						0										
	T1-70					0						_					

Other recommendation

UV indicating label



Major applications

- Determination of hardness of UV-cured resin (ink, paint, adhesives, etc.)
- Maintenance management of UV lamps (metal halide, mercury, ultraviolet lamps)
- •For disinfection practice

For UV process control

The four types of sensitivity cover a wide range of needs.



Available for wavelength of 365nm or longer. LED-2 is the brand-new product.



- · We do not assume any responsibility for defect, damage, or injury caused when the label is used in a way deviating from the normal purpose of use or when the product has been modified.
- This product will not insure the temperature accuracy in all operating environments or usage.
- We do not bear any responsibility for malfunction with respect to performance due to process control or maintenance management through the use of this product.
- For details, refer to our website (URL or QR code).

Distributor

NiGK Corporation

Overseas Business Development Division

TOKYU BLDG. EAST NO.5

2-25-5 Minami-ikebukuro, Toshima, Tokyo, 171-0022 Japan


Tel. +81-3-3986-3910 (English) Fax. +81-3-3983-8286

E-mail indicators@nichigi.co.jp

Website — https://nigkglobal.com



TEMPERATURE LABEL MADEIN JAPAN

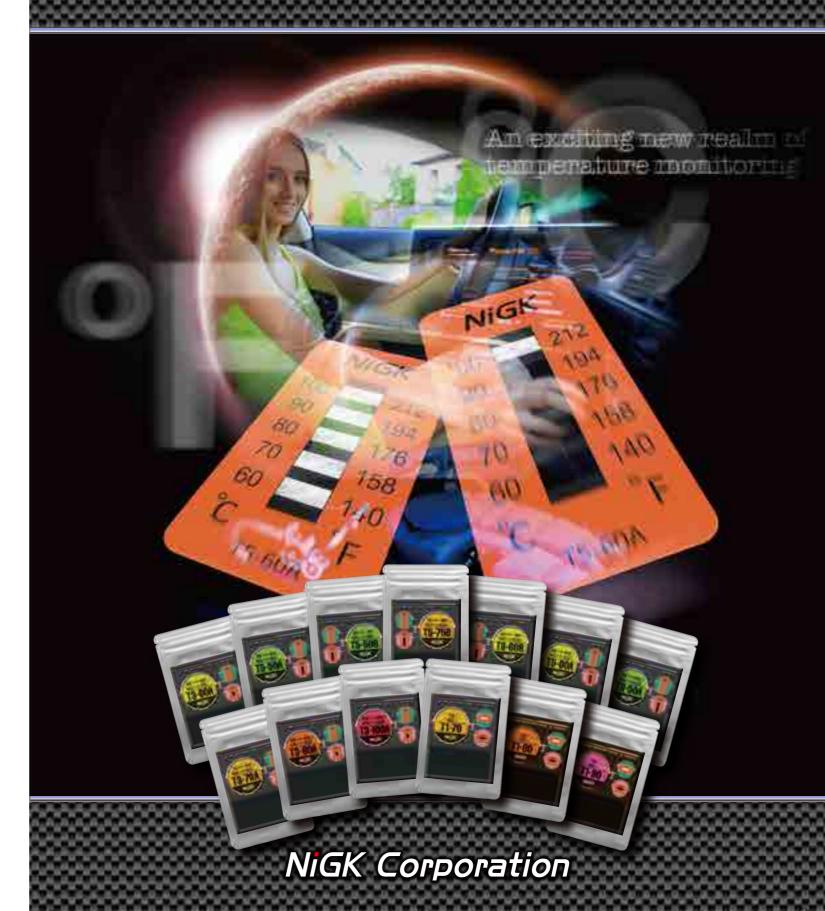

NiGK Corporation

Scan me!

Temperature is an important factor in all of our lives, supporting safety and quality in every field and category of business. Temperature monitoring is indispensable in fields such as process control, quality assurance, maintenance of machine/machinery, distribution, and infrastructure. Temperature Label requires no power supply no specific technology.

Just by applying the Temperature Label, you can quickly note temperature changes just by looking. NiGK provides quality control and temperature monitoring solutions for every profession.



Product Features

Lamination -

Laminate protects the indicator from dirt and water The laminate is a highly visible orange.

Self-adhesive-

An adhesive on the reverse side allows the Temperature Label to be easily applied just by peeling the backing

Dual temperature scale -

The Celsius temperature scale is easily noted and the corresponding Fahrenheit temperature is also displayed

processing uses:

Plastic components

Glass

Examples of manufacturing

· Rubber components (tires, etc.)

· Electric components for automobiles (lamps, meters, electronic circuits, ECU)

Semiconductors and electronic components

Non-reversible Once the temperature rises above a set point the temperature indicator does not erase the reading so past readings are not lost. Indicator As temperatures rise, the indicator will immediately change from white to black. (Such as when the monitored temperature rises above a desired set point)

Examples pertaining to maintenance


- · Rotating mechanical parts such as motors, railroad axles
- · Abnormal temperature monitoring of other in-factory facilities



How to choose

T8 series wide type is the best model when you define the range of temperature change of the object. You can choose the types of fewer levels like T5 and T3 if the temperature range is smaller. T1 is the best option when threshold temperature is defined and more visible size is preferred. According to the gap between levels you can choose A type(10°C pitch) or B type(5°C).



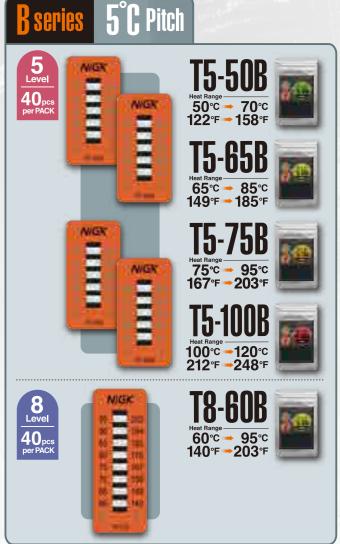



The label images shown above are only for illustrative purposes and do not refer to an actual result of discoloration at the time of temperature rise.

Before After

management through temperature monitoring:

Semiconductors and electronic components

- · Power equipment at transformation installation and terminal connecting parts
- Distribution/control equipment